

2, rue du Gabian MC98000 Monaco
 Tel. +377 97772700 +33 607932673 e-mail: info@mizarmarine.mc

Type	W-EHS P	Datasheet	42.5.30.6
Rev.	0	Date	02/03/2016
		Page	1/1

CONFIGURATION

Package system, completely automatic, assembled, cabled and ready for use. This plant is tested by the most important classification society

APPLICATION

Production and storage of hot water for sanitary use.

DESIGN CONDITIONS

Max. Pressure 6 bar
 Max. Temperature 90 °C
 Min. Temperature 0 °C

SPECIAL PLANTS

Particular constructions are realized on customer's specification.

ACCESSORIES AND COMPONENTS

MIZARMARINE systems can be supplied complete with monitoring equipments, valves, switchboards and other accessories which assure their proper functioning.

For an easier installation a wide range of components can be supplied.

TESTS

RINA - ABS - LR - BV - DNV - MMI

MATERIALS



X AISI 304 L
 XX AISI 316 L

CONNECTIONS

Threaded BSP - NPT
 Flanged UNI - DIN - ASME - JIS

TREATMENTS

Thermal insulation, MED approved hig density rock wool coated with natural aluminium or stainless steel sheet.
 Treatment of internal and external surfaces according to the application of the plant.

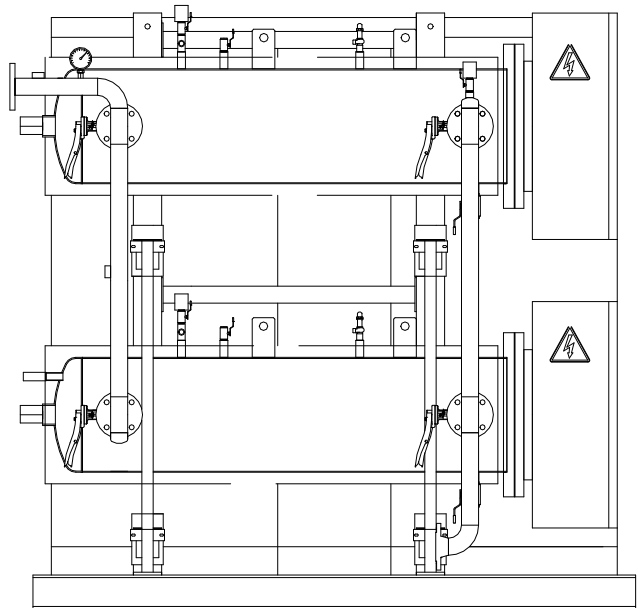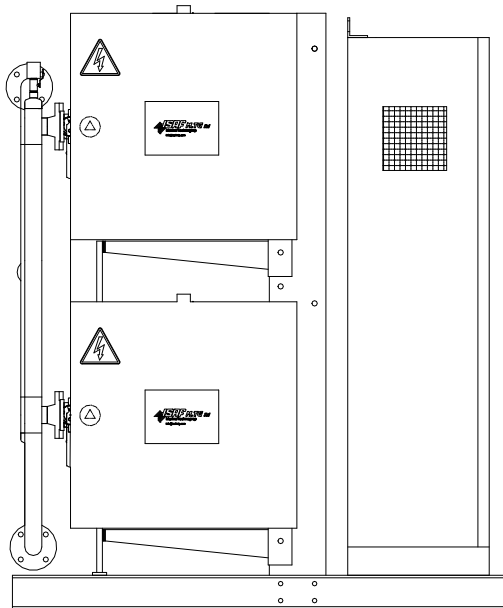

All information and data shown on this datasheet can be modified without notice

Modello	Power kW 400 Vac. Cartr. L.1.000	Power kW 440 Vac. Cartr. L.1.000	Power kW 400 Vac. Cartr. L.1.500	Power kW 440 Vac. Cartr. L.1.500	Power kW 690 Vac. Cartr. L.1.000	Power kW 600 Vac. Cartr. L.1.500	Flange size
W-EHC100	90-96-100	108-116-122	137-146-155	115-125	72-81-90	96-108-120	ND 50
W-EHC120	118-124-130	143-150-156	180-190-198	167-177-187	117-126-135	156-168-180	ND 65
W-EHC140	157-163-169	190-197-204	241-250-258	218-230-240	144-153-162	192-204-216	ND 80
W-EHC160				292-302-312	207-216-225	276-288-300	ND100